Maxima 360°

Adjustable Vortex Spray

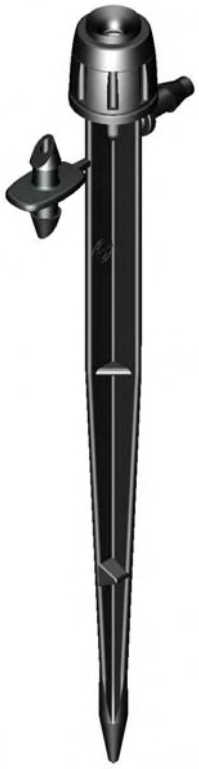

Maxima 360° Spike

Maxima 360°
½" NPT Female Thread

Maxima 360°
4.5 mm Barb

Maxima 360°
10-32 UNF Thread

METRIC PERFORMANCE DATA				
SPRAYS		PRESSURE (kPa)	FLOW (lph)	DIAMETER OF THROW (m)
	Adjustable to Maximum (approx) 14 Clicks	100	0 - 52	0 – 1.7
		150	0 - 65	0 – 2.8
		200	0 - 74	0 – 3.4
Tested 200 mm above Ground Level				
Recommended operating pressure 100 kPa				

OPERATION

Rotation of the Maxima cap allows simultaneous adjustment of flow rate and diameter of throw.
The ratchet click action between the cap and base allows the vortex pattern to be increased or decreased until final shut-off

PRODUCT FEATURES

- Four base options available, 4.5 mm Barb, 10-32 UNF Male Thread, ½" NPT Female Thread and Spike.
- Finger tip cap control for flow and throw adjustment.
- Vortex action distributes water evenly over the irrigated surface.

GENERAL APPLICATIONS

- Ideal for spot watering plants in small and large pots or larger areas including garden beds and landscapes.

Maxima 360°						
PACKAGING		BARB	THREAD	SPIKE	½" THREAD	PERFORMANCE GRAPHS
ORDER CODES	PACKS	200045	200055	200064	202074	
	BULK	020004	020005	020006	020207	
QUANTITY PER BAG	PACKS	50	50	25	25	
	BULK	1000	1000	1000	250	
BAGS PER CARTON	PACKS	100	100	40	70	
	BULK	7	7	1	7	
WEIGHT PER CARTON (kg)	PACKS	12.3	13.9	7.6	8.2	
	BULK	16.1	18.4	7.4	7.9	
BASE INLET CONNECTION		4.5 mm Barb	10-32 UNF Thread	4.5 mm Barb	½" NPT/F Thread	
DIMENSIONS OF MAXIMA 360° ASSEMBLED	HEIGHT	26 mm	26 mm	158 mm	30 mm	
	WIDTH	20 mm	20 mm	42 mm	27 mm	
	DEPTH	16 mm	16 mm	16 mm	27 mm	
	WEIGHT	2.2 g	2.5 g	6.4 g	3.9 g	
MATERIAL UV STABILISED	CAP	Polypropylene	Polypropylene	Polypropylene	Polypropylene	
	BASE	Polypropylene	Acetal	Polypropylene	Polypropylene	
	DEFL'CTR	Acetal	Acetal	Acetal	Acetal	

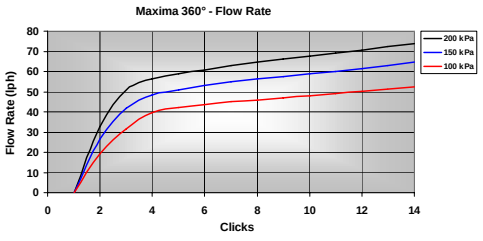

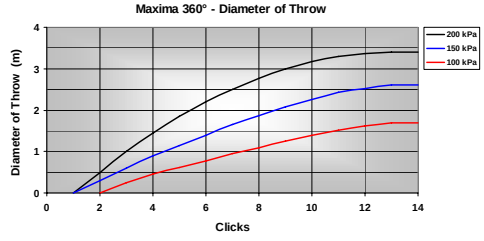

"Disclaimer" - TECO reserves the right to redesign its products, resulting in changes to specification and performance, at any time without notice.